



CTEK
LITHIUM XS

12V/5A

**COMPLETE
BATTERY
CARE**



EFFECTIVE LiFePO₄ BATTERY CHARGING AND MAINTENANCE

The LITHIUM XS is an advanced microprocessor controlled charger specially designed to recharge and maintain Lithium-Ion Phosphate (LiFePO₄) batteries – maximising their performance and lifespan. With up to 5A of charge current available the LITHIUM XS is extremely flexible and will charge LiFePO₄ batteries from 5Ah to 60Ah and maintain up to 120Ah.

Operation is simple and charging will commence upon connection. With no need to disconnect the battery from the vehicle, at charge start the LITHIUM XS will automatically reset any low voltage protection electronics (Battery Management System) fitted. Charging can be restarted manually at any time using the "Reset" button.

The LITHIUM XS is a fully automatic "connect and forget" charger with 8 charging steps including a testing sequence to show if the LiFePO₄ battery can take and retain charge, a unique maximisation step to restore full capacity, and patented maintenance charging to ensure maximum performance even after months of inactivity. Splash proof and dust proof (IP65) the LITHIUM XS is easy and safe to use, protects vehicle electronics, spark-free, reverse polarity protected and short circuit proof. The LITHIUM XS features a 5-year warranty.

TECHNICAL DATA

CHARGING VOLTAGE	13.8/14.4 VDC
CHARGE CURRENT	Max 5A
TYPE OF CHARGER	8-step, fully automatic charging cycle
TYPE OF BATTERY	12V Lithium Ion Phosphate (LiFePO ₄)
BATTERY CAPACITY	5-60Ah, maintenance charging up to 120Ah
PROTECTION RATING	IP 65 (splash and dust proof)

3

Step 3 - Battery ready to use

7

Step 7 - Fully charged battery

8

Step 8 - Maintenance charging

AUTO

Fully automatic for optimal charging

12V

For Lithium-Ion Phosphate LiFePO₄ batteries



CTEK
THE SMARTEST BATTERY CHARGERS IN THE WORLD



CTEK
LITHIUM XS

12V/5A



Complete LiFePO₄ battery care – unique and patented system to recover, charge and maintain LiFePO₄ batteries to maximise performance and extend life.


Safe to use – user safety through spark free operation and reverse polarity protection. Vehicle electrical safety through exceptionally clean voltage and current delivery with no surges or spikes. No need to disconnect battery from the vehicle when charging.

Connect and forget – simple plug and play operation. Manual Reset available.

Unique 8 step charging – the patented 8 step programme tests battery condition and, charges and maintains to ensure maximum LiFePO₄ battery life and performance. FLOAT/PULSE maintenance ensures ideal battery care during periods of inactivity.


Extends battery life – the unique features of CTEK chargers combine to maximise performance and extend LiFePO₄ battery life.

CONNECT AND FORGET

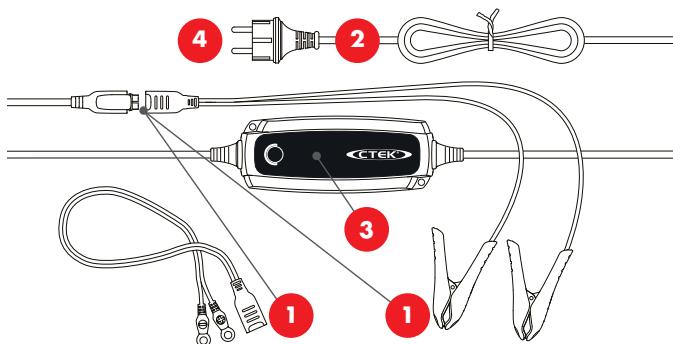

1. Connect the charger to the battery.
2. Connect the power cord to the power outlet. The power-on lamp is lit.
3. Charging starts.
4. Stop charging at any time by disconnecting the mains cable from the wall socket.

UNIQUE 8 STEP CHARGING FROM CTEK

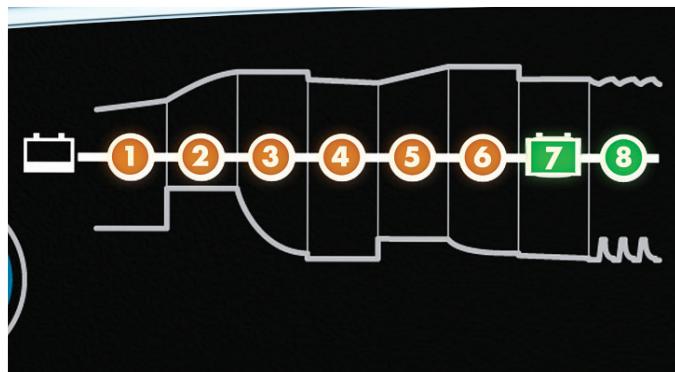

1 STEP 1 ACCEPT

Tests if the battery can accept charge. This step prevents charging from proceeding on a defective battery.

2 STEP 2 BULK

Charging with maximum current until approximately 90% battery capacity.

3 STEP 3 ABSORPTION

Charging with declining current to maximize up to 95% battery capacity.

4 STEP 4 ANALYZE

Tests if the battery can hold charge. Batteries that can not hold charge may need to be replaced.

5 STEP 5 COMPLETION

Final charge with reduced current up to approximately 98% battery capacity.

6 STEP 6 MAXIMIZATION

Final charge with maximum voltage up to 100% battery capacity.

7 STEP 7 FLOAT

Maintaining the battery voltage at maximum level by providing a constant voltage charge.

8 STEP 8 PULSE

Maintaining the battery at 95–100% capacity. The charger monitors the battery voltage and gives a pulse when necessary to keep the battery fully charged.

GUARANTEED QUALITY WITH CTEK

CTEK customer support is available to answer any questions related to charging and CTEK chargers. Safety, simplicity and flexibility characterizes all products and solutions developed and sold by CTEK. CTEK supply chargers to more than 60 countries throughout the world. CTEK is also a reliable OEM supplier to many of the world's most prestigious car and motorcycle manufacturers.

Contact customer support: info@ctek.com



Some experts believe the incorrect or prolonged use of almost any product could cause serious injury or death. For information that may reduce your risk of serious injury or death consult the points below and additionally, the information available at www.datastreamserver.com/safety

- Consult all documentation, packaging and product labelling before use. Note that some products feature online documentation which should be printed and kept with the product.
- Check product for loose / broken / damaged / missing parts, wear or leaks (if applicable) before each use. Never use a product with loose / broken / damaged / missing parts, wear or leaks (if applicable).
- Products must be inspected and serviced (if applicable) by a qualified specialist every 6 months assuming average residential use by a person of average weight and strength, above average technical aptitude, on a property matching average metropolitan specification. Intended use outside these guidelines could indicate the product is not suitable for intended use or may require more regular inspection or servicing.
- Ensure all possible users of the product have completed an industry recognised training course before being given access to the product.

- The product has been supplied by a general merchandise retailer that may not be familiar with your specific application or your description of the application. Be sure to attain third party approval for your application from a qualified specialist before use regardless of prior assurances by the retailer or its representatives.
- This product is not intended for use where fail-safe operation is required. As with any product (take an automobile, aircraft, computer or ball point pen for example) there is always a small chance of a technical issue that needs to be repaired or may require replacement of the product or a part. If the possibility of such failure and the associated time it takes to rectify could in any situation inconvenience the user, business or employee or could financially affect the user, business or employee then the product is not suitable for your requirements. This product is not for use where incorrect operation or a failure of any kind, including but not limited to a condition requiring product return, replacement, service by a technician or replacement of parts could cause a financial loss, loss of employee time or an inconvenience requiring compensation.
- If this item has been purchased in error considering the points above simply contact the retailer directly for details of their returns policies if required.