


**ATTACH SUPPORT BAR
SECURELY INTO RAILS
BEFORE USING.**



PARTS LIST

**(A) 2 COUPLINGS (B) 2 SLEEVES
(C) SUPPORT BAR (D) 2 BOLTS
(E) 2 LOCK NUTS**

MOUNTING INSTRUCTIONS

FOR SUPPORT BAR

- (A) INSERT SUPPORT BAR IN ROUND COUPLINGS SLOTS.
- (B) INSERT SLEEVES IN ROUND COUPLING HOLES THROUGH SUPPORT BAR.
- (C) INSERT ROUND COUPLINGS INTO LADDER ENDS (BE SURE PADS FACE DOWNWARD)
- (D) INSERT BOLTS THROUGH RAILS AND SLEEVES.
- (E) PLACE LOCK NUTS ON BOLTS AND TIGHTEN FULLY.

EXTENDING THE LADDER

- 1) For telescopic step ladder: With your two handles grip the ladder from both sides and pull upwards extending this section for your demand, then pull the release rod to A frame position, locked the hinge.
- 2) For straight telescopic ladder: Pull the release rod to straight position, locked the hinge, extended ladder step by step and reach this section for your demand.
- 3) For stairway telescopic step ladder: With your two handles grip the ladder from both sides and pull upwards extending this section for your demand, then pull the release rod to A frame position, locked the hinge, folded one side in right position for stairway.

COMPACTING THE LADDER

- When you have finished using the ladder you can retract it down to the storage size:
Folded the ladder, then close the ladder step by step with your both handles..

STORAGE

The ladder must be stored in a safe dry location away from children and excessive heat.

MULTI PURPOSE TELESCOPIC LADDER

USER GUIDE



**IMPORTANT
READ THESE INSTRUCTIONS BEFORE USE
AND RETAIN FOR FUTURE REFERENCE.**



WARNING! TO AVOID SERIOUS INJURY OR DEATH, PLEASE READ ALL THESE INSTRUCTIONS AND OBSERVE ALL WARNING LABELS ON THE PRODUCT BEFORE USE! KEEP MANUAL WITH THE PRODUCT FOR FUTURE REFERENCE.

IMPORTANT SAFETY INFORMATION!

- **DANGER! METAL CONDUCTS ELECTRICITY!**
Do Not let this ladder or any of its parts contact live electrical wires.
- Maximum load for this ladder is 150kg. The weight of user plus tools and materials should not exceed 150kg.
- Always ensure that the locking mechanisms due to have weight placed on them are in the locked position before applying weight to the ladder. ALL the mechanisms should be locked if using the ladder at full extension!
- The ladder must be used with regular distances between the steps.
- Do Not use any attachments, components or accessories not sold or recommended by the manufacturer with this ladder.
- Inspect the ladder after delivery, before use to confirm condition and operation of all parts. Inspect all parts prior to each use. Do Not use if any parts of the ladder are missing, damaged or worn in any way. For professional users regular periodic inspections are required.
- Ensure the ladder is suitable for the task. Do Not attempt to modify this ladder in any way. Doing so may result in serious injury, and will void the guarantee.
- Never attempt to repair a damaged ladder. Always have a qualified repair person repair the damaged ladder.
- Destroy ladder if exposed to excessive heat (such as in a house fire) or corrosive agents (like acids or alkalis).
- Always use a firm grip and face ladder whenever possible.
- Always set up the ladder on a surface that is level, stable and dry. Never place the ladder on a slippery surface or try to increase the height of the ladder by placing anything under the rubber feet.
- Always ensure both rubber feet are firmly supported before stepping on the ladder.
- Observe extreme caution when using the ladder in windy, rainy or icy conditions, or when using on a protective surface such as thick carpet or rug. This may prevent the rubber feet from gripping properly.
- Use caution when getting on or off ladder.
- Never use the ladder while under the influence of alcohol or drugs of any kind. The user should be in good physical condition to use this ladder.
- Never set up the ladder in front of doors that are not locked.
- Never use the ladder as a brace in any way.
- Do Not use ladder jacks with this ladder.
- Do Not use the ladder in a horizontal position, such as resting on a step.
- Do Not, open, close, or use the ladder upside down.

- The ladder must not be used hanging from the top rung.
- Always transport in the compacted position.
- Avoid subjecting the ladder to knocks or rough treatment.
- Avoid using in water-filled wells (e.g.) as this could lead to a malfunction of the telescopic tubes.
- Pushing or pulling anything while on the ladder or scaffold may cause the ladder to tip and you to fall. Use extreme caution if you must push or pull from the ladder.
- Never attempt to jump, walk or move ladder while on it. If you need to move the ladder get off it first. Move it, then reposition yourself.
- To avoid losing your balance and/or tipping the ladder never overreach. Always stay balanced and keep your body centred between the side rails.
- Never place yourself or allow anyone to stand or work under the ladder while in use.
- This ladder is not a toy and not meant for use by or near children. Never leave the ladder set up and unattended.
- Do Not stand on the ladder while releasing the locking mechanisms.
- Never stand or climb closer than 3 feet from the top rung - you can lose your balance!
- Always wear shoes that have good grip while using this ladder. Avoid wearing loose clothing that could dangle and get caught.
- Remove any contamination such as wet paint, mud, oil or snow.
- Face the ladder when ascending and descending.
- For professional users regular periodic inspections are required.
- Maintain a handhold whilst working from a ladder or take additional safety precautions if you cannot.
- If the ladder is used for access to a higher level it must extend at least 1m above the landing point. Only use the ladder at full extension as a leading ladder at an angle of 75°.

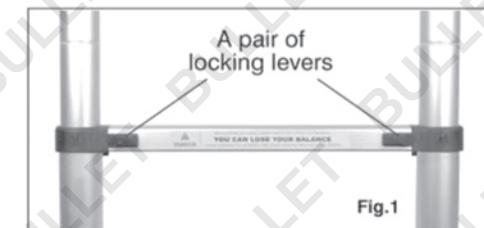
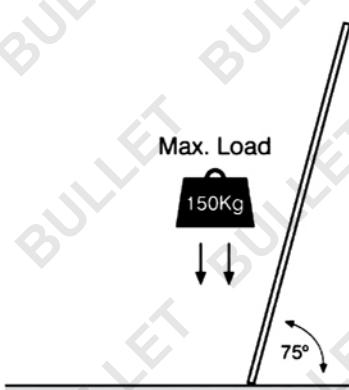


Fig.1

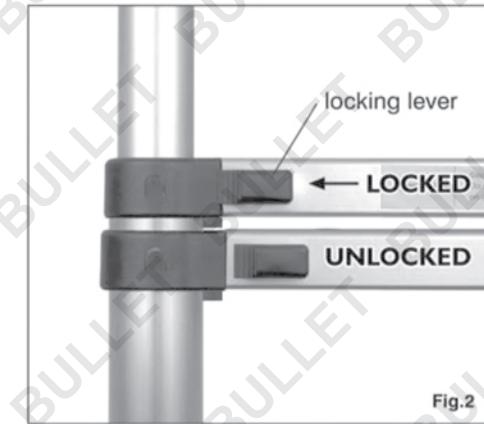


Fig.2

THE LOCKING MECHANISMS


IMPORTANT! Familiarize yourself with how the ladder works before use!

- Each step on the ladder has a pair of locking mechanisms. These consist of spring-loaded steel pins that automatically lock into place as the ladder is extended.
- Each mechanism is connected to a locking lever visible on the outside (see Fig.1). The locking levers have 2 purposes. They indicate whether the mechanism is locked (or not), and they serve as buttons for releasing the pins (lowering the ladder). A lever that is close to the side rail indicates the mechanism is locked. A lever away from the side rail indicates that it is NOT locked (see Fig.2).


CAUTION! The locking mechanisms may appear to audibly 'click' shut, but always visually check that the levers appear locked. The locking mechanism must be fully secured before use.

THE LOCKING MECHANISM MUST BE LOCKED BEFORE USING LADDER

HINGE OPERATION




To unlock hinge: Pull from center of Hinge Release Rod then let go.

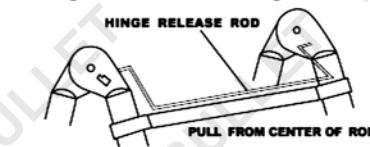

To lock hinge: Move ladder to two hinge lock position. Make sure the Lock Bolts lock in place on both hinges. Check the label on both hinges to be certain they are locked.
(If necessary move the ladder section slightly back and forth to ensure locking)

HINGE POSITIONS

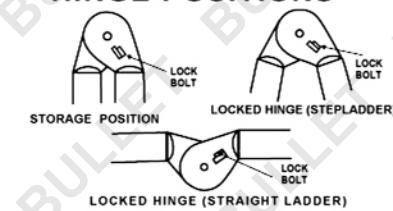

- Be sure all hinges are locked before using the ladder.
- Never use anything other than hand to lift up the hinge release rod.
- Never use hinge release rod to adjust, move, or transport ladder.
- Do not use this ladder if lock bolts do not lock in place.
- Keep hinges clean and free of dirt, paint, snow, etc.
- The hinges in this ladder have been lubricated at the factory.

For best operation depending on actual use clean and lubricate hinges periodically with a light machine oil.



Some experts believe the incorrect or prolonged use of almost any product could cause serious injury or death. For information that may reduce your risk of serious injury or death consult the points below and additionally, the information available at www.datastreamserver.com/safety

- Consult all documentation, packaging and product labelling before use. Note that some products feature online documentation which should be printed and kept with the product.
- Check product for loose / broken / damaged / missing parts, wear or leaks (if applicable) before each use. Never use a product with loose / broken / damaged / missing parts, wear or leaks (if applicable).
- Products must be inspected and serviced (if applicable) by a qualified specialist every 6 months assuming average residential use by a person of average weight and strength, above average technical aptitude, on a property matching average metropolitan specification. Intended use outside these guidelines could indicate the product is not suitable for intended use or may require more regular inspection or servicing.
- Ensure all possible users of the product have completed an industry recognised training course before being given access to the product.

- The product has been supplied by a general merchandise retailer that may not be familiar with your specific application or your description of the application. Be sure to attain third party approval for your application from a qualified specialist before use regardless of prior assurances by the retailer or its representatives.
- This product is not intended for use where fail-safe operation is required. As with any product (take an automobile, aircraft, computer or ball point pen for example) there is always a small chance of a technical issue that needs to be repaired or may require replacement of the product or a part. If the possibility of such failure and the associated time it takes to rectify could in any situation inconvenience the user, business or employee or could financially affect the user, business or employee then the product is not suitable for your requirements. This product is not for use where incorrect operation or a failure of any kind, including but not limited to a condition requiring product return, replacement, service by a technician or replacement of parts could cause a financial loss, loss of employee time or an inconvenience requiring compensation.
- If this item has been purchased in error considering the points above simply contact the retailer directly for details of their returns policies if required.