



FOLDING ALUMINIUM MULTIPURPOSE LADDER

USER MANUAL

[Revision 1.0 July 2016]

RETAIN THIS MANUAL FOR FUTURE REFERENCE


PLEASE READ THIS MANUAL CAREFULLY BEFORE USE

TABLE OF CONTENTS


SAFETY	1
ASSEMBLY	1
HINGES	2
MAINTENANCE	2
TECHNICAL SPECIFICATIONS	3

SAFETY

- This ladder may only be used in the positions as shown in the images below:

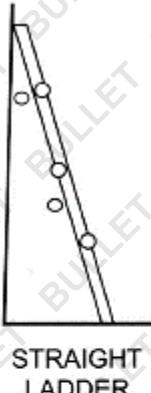


STRAIGHT LADDER




STEP LADDER




SCAFFOLD

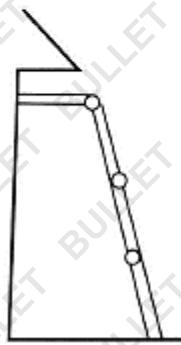

OVERHANG LADDER



STAIRWELL SCAFFOLD




STORAGE

- Due care and attention should be paid at all times when using the ladder.
- Always check the stability of the ladder by ensuring that it is placed on level and solid ground. Always check that all hinges are in the correct positions for your particular use.
- The platform may only be used when the ladder is in one of the horizontal positions.
- Set at proper (75.5 degree) angle in a straight position.

ASSEMBLY


IMPORTANT! Stabilisers must be fitted first before use.

- Place the stabiliser bar into the end of the side rails (see diagram).
- Secure the stabiliser bar with the nut and bolt.

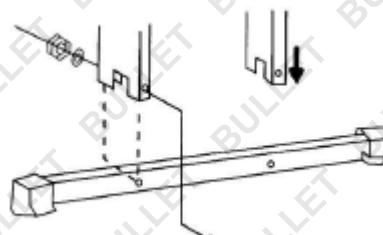

HINGES


1. To unlock the hinges, simply move the handle to the "O" unlock position (see diagram) and then fold the ladder section inward.
2. The hinges will automatically lock into position once the ladder is unfolded.
3. Always check that all hinges are securely locked into position before using the ladder.
4. Each pair of hinges must be locked simultaneously.
5. It is extremely dangerous to attempt to alter the positioning of the ladder, hinges or operating joints while the ladder is in use.
6. Always keep the joints clean and free from all foreign materials, it is advisable to cover the joints during exceptionally messy jobs.

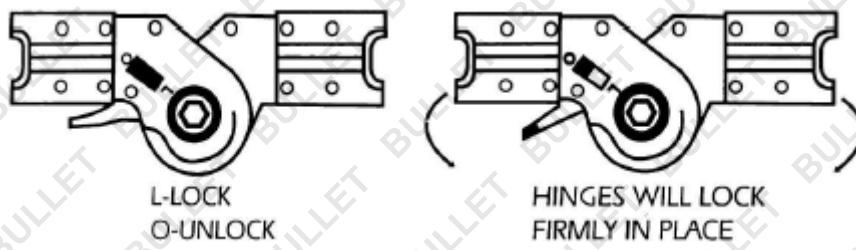

CAUTION!

To open the ladder section:

- Place the locking pin (black) to the "O" position.
- The hinge is locked when in the "L" position.

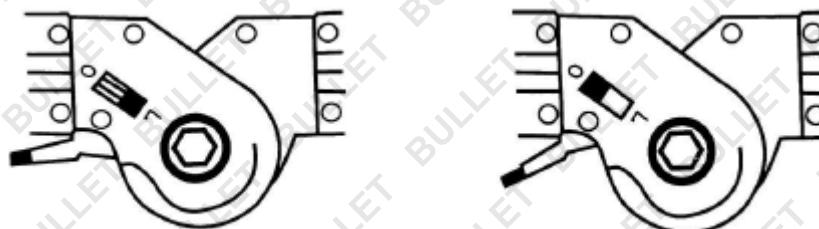

MAINTENANCE

IMPORTANT! This ladder should never be used if any part is missing, damaged or worn.

- The hinges should be lubricated with a good quality lubricant to ensure mobility.
- The hinges should be cleaned after use especially when the hinges have been subjected to dust or dirt.
- Clean the area, or wash with warm water. However should water be used on the hinges, please remember to re-lubricate after drying.

Following the above instructions will help to maintain your appliance and ensure its maximum lifespan.

TECHNICAL SPECIFICATIONS

LOAD CAPACITY	150kg
STEP DISTANCE	28cm
STEPS	20
MATERIAL	Aluminium
MAX REACH	5.8m
A-FRAME HEIGHT	2.79m
SCAFFOLD HEIGHT	1.55m
STEP LADDER HEIGHT	1.45m



Some experts believe that the incorrect or prolonged use of almost any product may cause serious injury or death. To help reduce your risk of serious injury or death, refer to the information below. For more information, see www.datastreamserver.com/safety

- Consult all documentation, packaging and product labelling before use. Note that some products feature documentation available online. It is recommended to print and retain the documentation.
- Before each use, check the product for loose/broken/damaged/missing parts, wear or leaks (if applicable). Never use a product with loose/broken/damaged/missing parts, wear or leaks.
- Products must be inspected and serviced (if applicable) by a qualified technician every 6 months. This is based on average residential use by persons of average size and strength, and on a property of average metropolitan size. Use beyond these recommendations may require more frequent inspections/servicing.
- Ensure that all users of the product have completed a suitable industry recognised training course before being allowed access to the product.
- The product has been supplied by a general merchandise retailer that may not be familiar with your specific application or description of application. Be sure to attain third-party approval from a qualified specialist for your application before use, regardless of any assurances from the retailer or its representatives.
- This product is not intended for use where fail-safe operation is required. As with any product (for example, automobile, computer, toaster), there is the possibility of technical issues that may require the repair or replacement of parts, or the product itself. If the possibility of such failure and the associated time it may take to rectify could in any way inconvenience the user, business or employee, or financially affect the user, business or employee, then the product is not suitable for your requirements. This product is not intended for use where incorrect operation or a failure of any kind, including but not limited to, a condition requiring product return, replacement, parts replacement or service by a technician may cause financial loss, loss of employee time or an inconvenience requiring compensation.
- If this product has been purchased in error when considering the information presented here, contact the retailer directly for details of their returns policy, if required.

